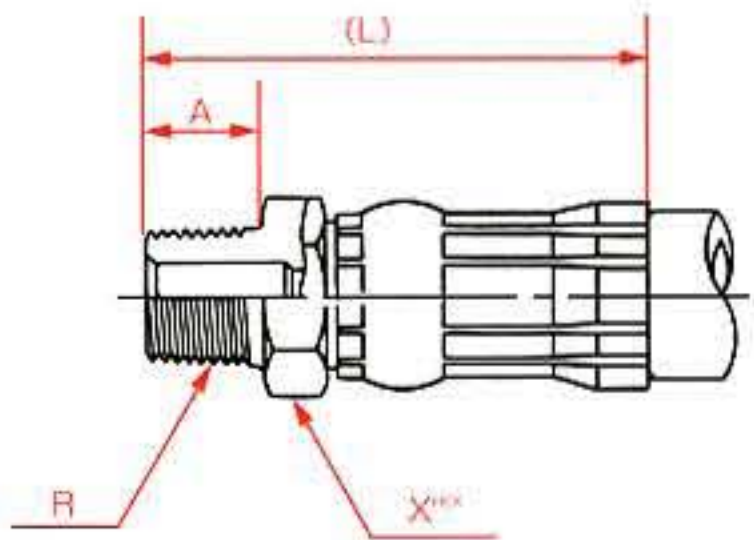
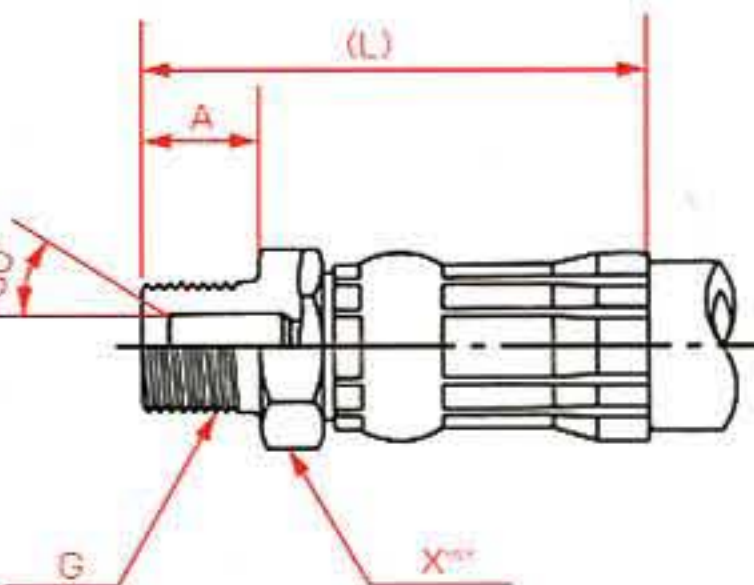
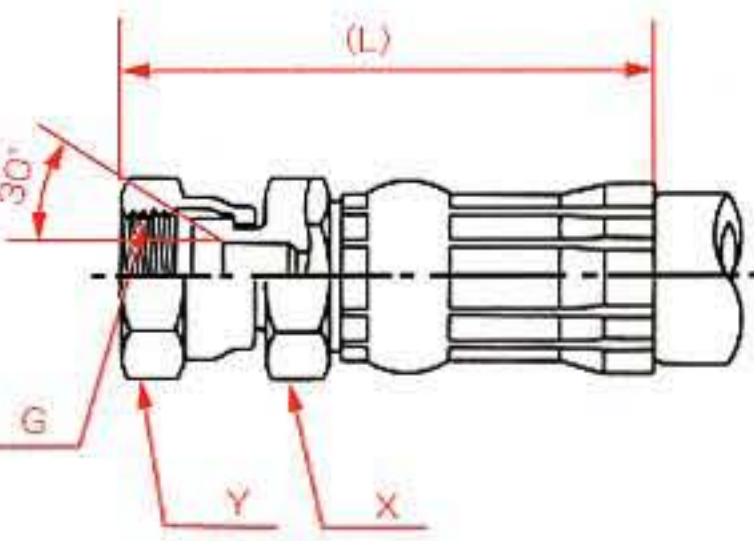
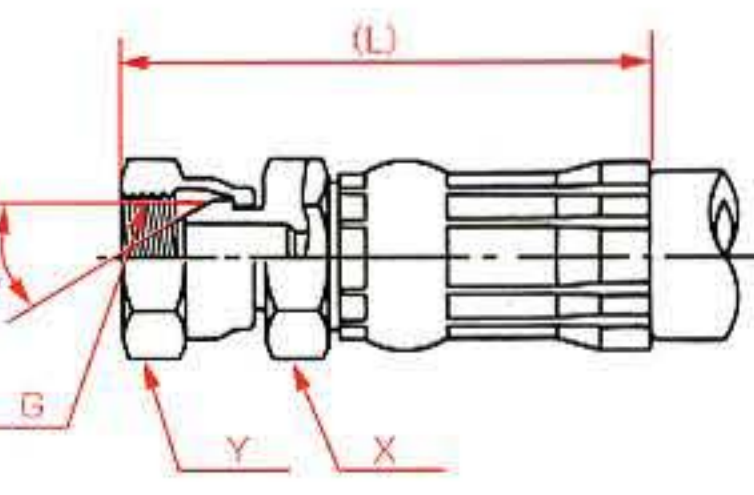
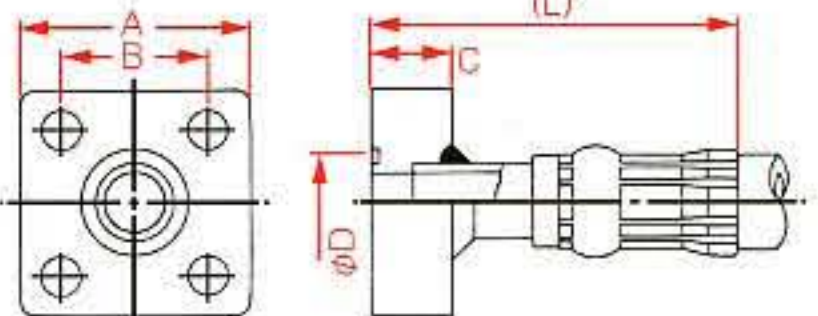
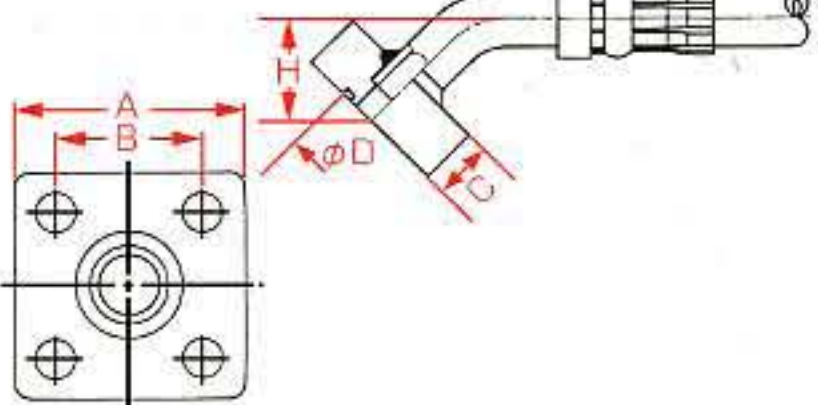
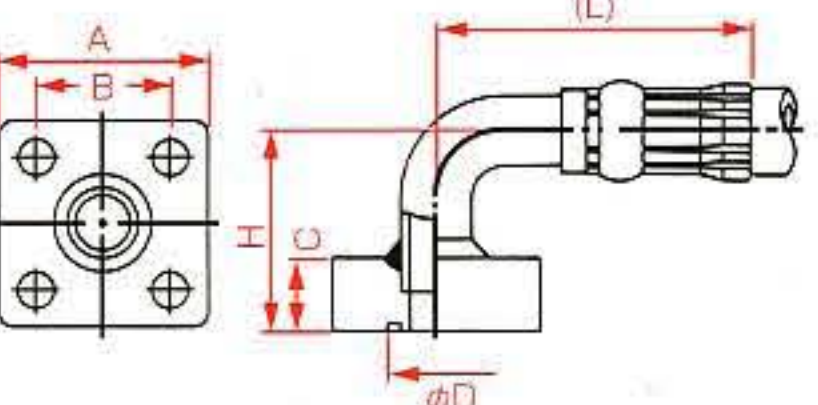
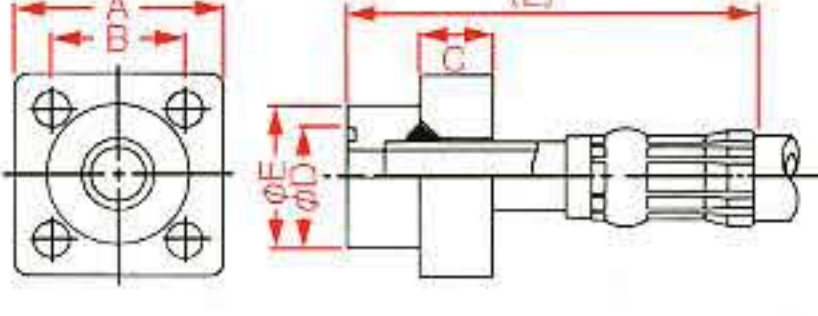


## G210ホース用金具

| 形状                                                                                                                 | 金具品番    | ねじ<br>R(PT) | 内径<br>mm | A<br>mm | (L)<br>mm | X<br>mm | 概略<br>重量<br>g |
|--------------------------------------------------------------------------------------------------------------------|---------|-------------|----------|---------|-----------|---------|---------------|
| 1001 管用テーパードねじ<br>                | 1001 6  | 1/4         | 4.0      | 13      | 50        | 17      | 60            |
|                                                                                                                    | 1001 9  | 3/8         | 6.5      | 15      | 54        | 19      | 80            |
|                                                                                                                    | 1001 12 | 1/2         | 9.5      | 18      | 70        | 22      | 240           |
|                                                                                                                    | 1001 19 | 3/4         | 15.0     | 20      | 85        | 30      | 460           |
|                                                                                                                    | 1001 25 | 1           | 20.5     | 22      | 94        | 36      | 510           |
|                                                                                                                    | 1001 32 | 1 1/4       | 25.5     | 25      | 115       | 46      | 810           |
|                                                                                                                    | 1001 38 | 1 1/2       | 32.0     | 25      | 135       | 50      | 1075          |
|                                                                                                                    | 1001 50 | 2           | 43.0     | 29      | 157       | 65      | 2140          |
| 1002 管用平行ドねじ<br>                | 1002 6  | 1/4         | 4.0      | 13      | 50        | 17      | 60            |
|                                                                                                                    | 1002 9  | 3/8         | 6.5      | 15      | 54        | 19      | 80            |
|                                                                                                                    | 1002 12 | 1/2         | 9.5      | 18      | 70        | 22      | 240           |
|                                                                                                                    | 1002 19 | 3/4         | 15.0     | 20      | 85        | 30      | 460           |
|                                                                                                                    | 1002 25 | 1           | 20.5     | 22      | 94        | 36      | 510           |
|                                                                                                                    | 1002 32 | 1 1/4       | 25.5     | 25      | 115       | 46      | 810           |
|                                                                                                                    | 1002 38 | 1 1/2       | 32.0     | 25      | 135       | 50      | 1075          |
|                                                                                                                    | 1002 50 | 2           | 43.0     | 29      | 157       | 65      | 2140          |
| 1004 管用平行めねじユニオン<br>(めすシート)<br> | 1004 6  | 1/4         | 4.0      | 55      | 19        | 17      | 75            |
|                                                                                                                    | 1004 9  | 3/8         | 6.5      | 59      | 22        | 19      | 95            |
|                                                                                                                    | 1004 12 | 1/2         | 9.5      | 75      | 27        | 22      | 270           |
|                                                                                                                    | 1004 19 | 3/4         | 15.0     | 89      | 36        | 30      | 520           |
|                                                                                                                    | 1004 25 | 1           | 20.5     | 98      | 41        | 36      | 570           |
|                                                                                                                    | 1004 32 | 1 1/4       | 25.5     | 122     | 50        | 46      | 890           |
|                                                                                                                    | 1004 38 | 1 1/2       | 32.0     | 144     | 60        | 50      | 1250          |
|                                                                                                                    | 1004 50 | 2           | 43.0     | 165     | 70        | 65      | 2320          |
| 1005 管用平行めねじユニオン<br>(おすシート)<br> | 1005 6  | 1/4         | 4.0      | 55      | 19        | 17      | 75            |
|                                                                                                                    | 1005 9  | 3/8         | 6.5      | 59      | 22        | 19      | 95            |
|                                                                                                                    | 1005 12 | 1/2         | 9.5      | 75      | 27        | 22      | 270           |
|                                                                                                                    | 1005 19 | 3/4         | 15.0     | 89      | 36        | 30      | 520           |
|                                                                                                                    | 1005 25 | 1           | 20.5     | 98      | 41        | 36      | 570           |
|                                                                                                                    | 1005 32 | 1 1/4       | 25.5     | 122     | 50        | 46      | 890           |
|                                                                                                                    | 1005 38 | 1 1/2       | 32.0     | 144     | 60        | 50      | 1250          |
|                                                                                                                    | 1005 50 | 2           | 43.0     | 165     | 70        | 65      | 2320          |

#### G210ホース用金具

| 形状                                                                                                                        | 金具品番     | 内径<br>mm | A<br>mm | B<br>mm | C<br>mm | D<br>mm | H<br>mm | (L)<br>mm | 概略<br>重量<br>g |
|---------------------------------------------------------------------------------------------------------------------------|----------|----------|---------|---------|---------|---------|---------|-----------|---------------|
| SHAST ストレートJIS21MPa<br>SHA固定型フランジ<br>    | SHAST 12 | 16.0     | 63      | 40      | 22      | 30      | -       | 84        | 720           |
|                                                                                                                           | SHAST 19 | 20.0     | 68      | 45      | 22      | 35      | -       | 108       | 920           |
|                                                                                                                           | SHAST 25 | 25.0     | 80      | 53      | 28      | 40      | -       | 112       | 1600          |
|                                                                                                                           | SHAST 32 | 25.5     | 90      | 63      | 28      | 45      | -       | 135       | 2210          |
|                                                                                                                           | SHAST 38 | 32.0     | 100     | 70      | 36      | 55      | -       | 160       | 3270          |
|                                                                                                                           | SHAST 50 | 43.0     | 112     | 80      | 36      | 65      | -       | 181       | 4660          |
| SHA45 45° JIS21MPa<br>SHA固定型フランジ<br>   | SHA45 12 | 16.0     | 63      | 40      | 22      | 30      | 39.0    | 132       | 850           |
|                                                                                                                           | SHA45 19 | 20.0     | 68      | 45      | 22      | 35      | 40.0    | 148       | 1550          |
|                                                                                                                           | SHA45 25 | 25.0     | 80      | 53      | 28      | 40      | 41.5    | 151       | 1845          |
|                                                                                                                           | SHA45 32 | 25.5     | 90      | 63      | 28      | 45      | 50.0    | 194       | 2150          |
|                                                                                                                           | SHA45 38 | 32.0     | 100     | 70      | 36      | 55      | 53.0    | 225       | 3880          |
|                                                                                                                           | SHA45 50 | 43.0     | 112     | 80      | 36      | 65      | 65.0    | 243       | 6000          |
| SHA90 90° JIS21MPa<br>SHA固定型フランジ<br>   | SHA90 12 | 16.0     | 63      | 40      | 22      | 30      | 67      | 97        | 850           |
|                                                                                                                           | SHA90 19 | 20.0     | 68      | 45      | 22      | 35      | 77      | 122       | 1210          |
|                                                                                                                           | SHA90 25 | 25.0     | 80      | 53      | 28      | 40      | 93      | 135       | 2010          |
|                                                                                                                           | SHA90 32 | 25.5     | 90      | 63      | 28      | 45      | 108     | 172       | 2930          |
|                                                                                                                           | SHA90 38 | 32.0     | 100     | 70      | 36      | 55      | 126     | 207       | 4215          |
|                                                                                                                           | SHA90 50 | 43.0     | 112     | 80      | 36      | 65      | 141     | 228       | 6400          |
| SHALS ストレートJIS21MPa<br>SHAルーズ型フランジ<br> | SHALS 12 | 16.0     | 63      | 40      | 22      | 30      | 44      | 106       | 1470          |
|                                                                                                                           | SHALS 19 | 20.0     | 68      | 45      | 22      | 35      | 51      | 108       | 1560          |
|                                                                                                                           | SHALS 25 | 25.0     | 80      | 53      | 28      | 40      | 60      | 144       | 2020          |
|                                                                                                                           | SHALS 32 | 25.5     | 90      | 63      | 28      | 45      | 74      | 170       | 4110          |
|                                                                                                                           | SHALS 38 | 32.0     | 100     | 70      | 36      | 55      | 79      | 189       | 5160          |
|                                                                                                                           | SHALS 50 | 43.0     | 112     | 80      | 36      | 65      | 93      | 216       | 7270          |