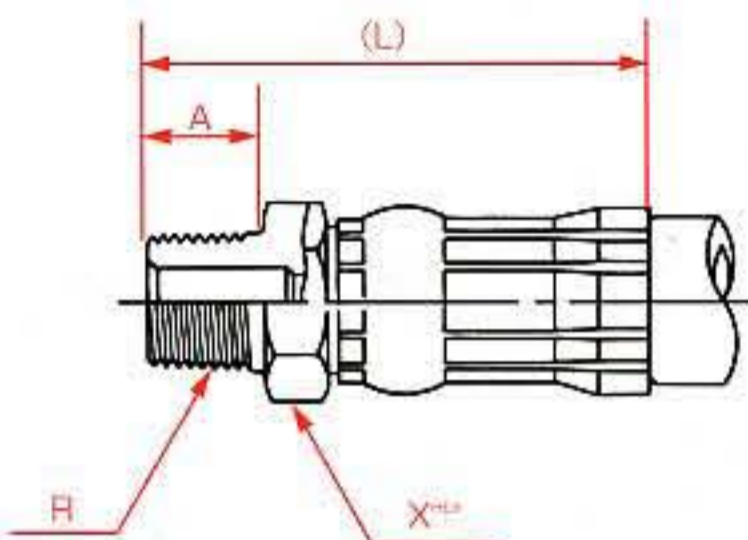
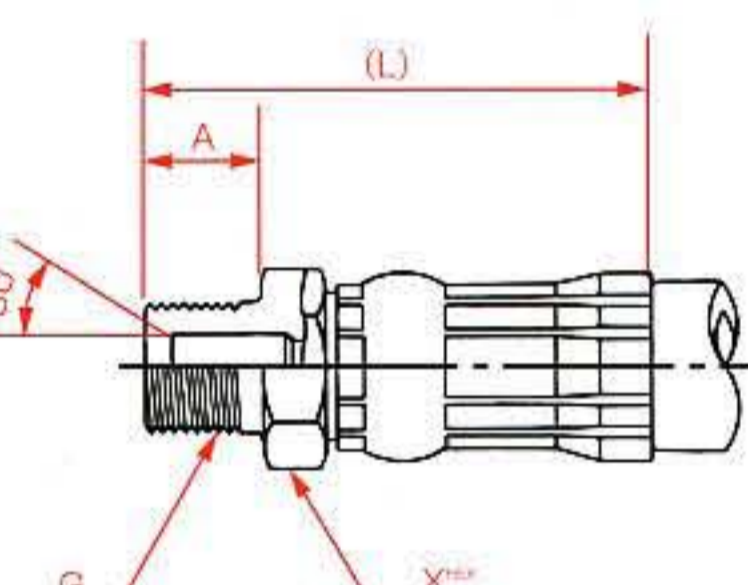
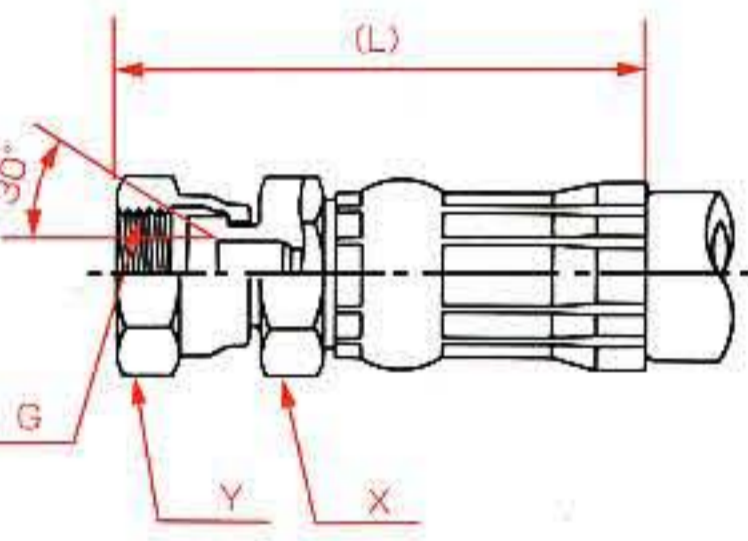
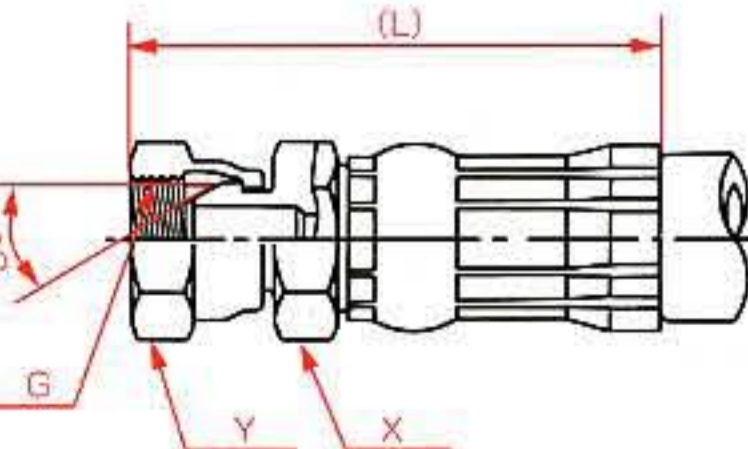
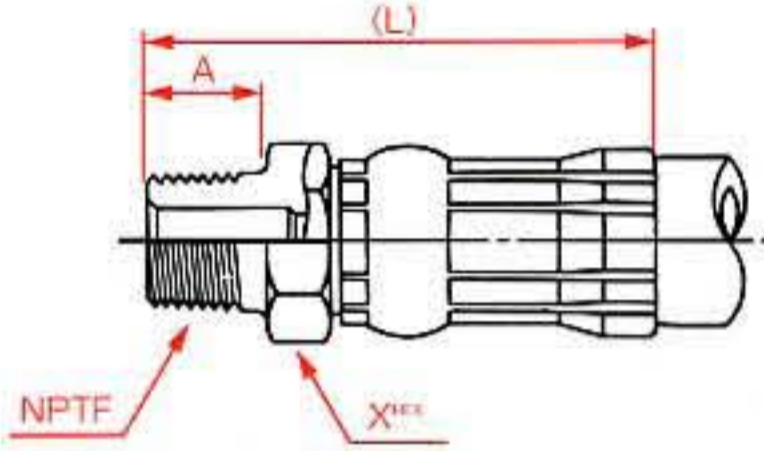


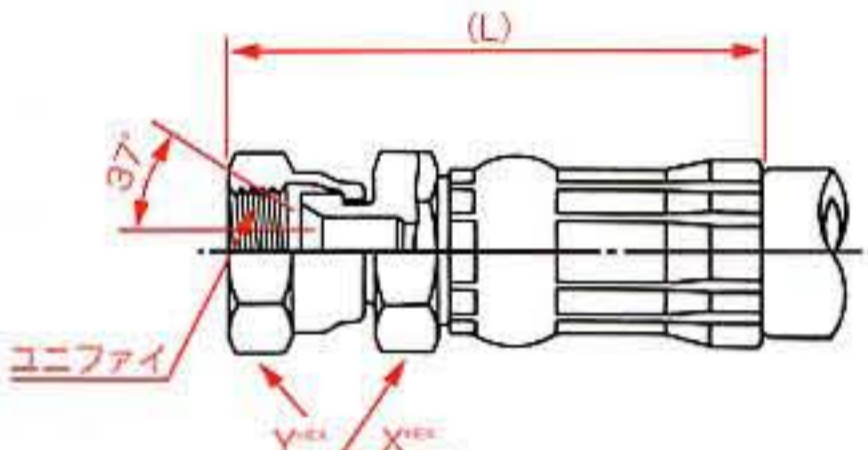
OMB10・15・20ホース用

形状	金具品番	ねじ R(PT)	内径 mm	A mm	X mm	(L) mm	概略 重量 g
1001 管用テーパおねじ 	1001 -20	1/4	25.5	25	46	115	810
	1001 -24	1/2	32.0	25	50	135	1075
	1001 -32	2	43.0	29	65	156	2140
形状	金具品番	ねじ G(PF)	内径 mm	A mm	X mm	(L) mm	概略 重量 g
1002 管用平行おねじ 	1002 -20	1/4	25.5	25	46	115	810
	1002 -24	1/2	32.0	25	50	135	1075
	1002 -32	2	43.0	29	65	156	2140
形状	金具品番	ねじ G(PF)	内径 mm	X mm	Y mm	(L) mm	概略 重量 g
1004 管用平行めねじユニオン (めすシート) 	1004 -20	1/4	25.5	46	50	122	890
	1004 -24	1/2	32.0	50	60	144	1250
	1004 -32	2	43.0	65	70	165	2320
形状	金具品番	ねじ G(PF)	内径 mm	X mm	Y mm	(L) mm	概略 重量 g
1005 管用平行めねじユニオン (おすシート) 	1005 -20	1/4	25.5	46	50	122	890
	1005 -24	1/2	32.0	50	60	144	1250
	1005 -32	2	43.0	65	70	165	2320

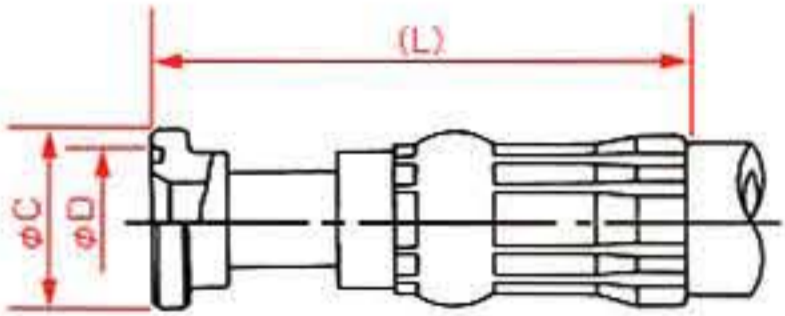
形状	金具品番	ねじ (NPTF)	A mm	内径 mm	X mm	(L) mm	概略 重量 g
6012 管用テーパーパーおねじ	6012 -20	1 1/4	25	25.5	46	115	810
	6012 -24	1 1/2	25	32.0	50	135	1075
	6012 -32	2	30	43.0	65	157	2140

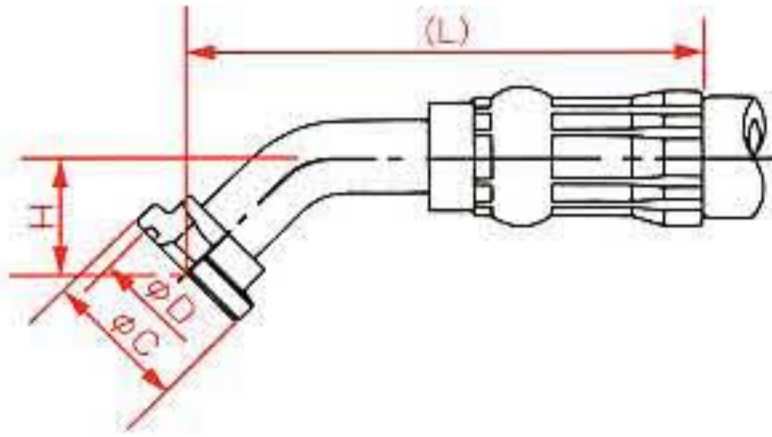
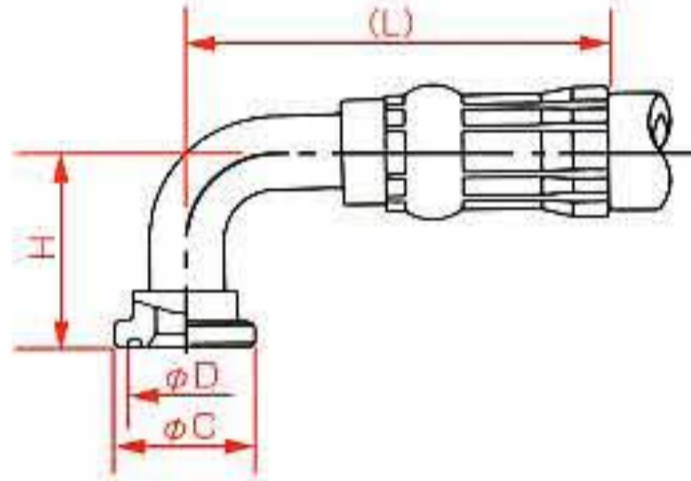
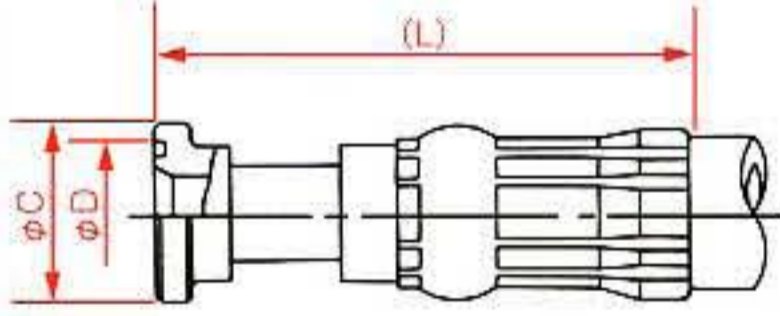
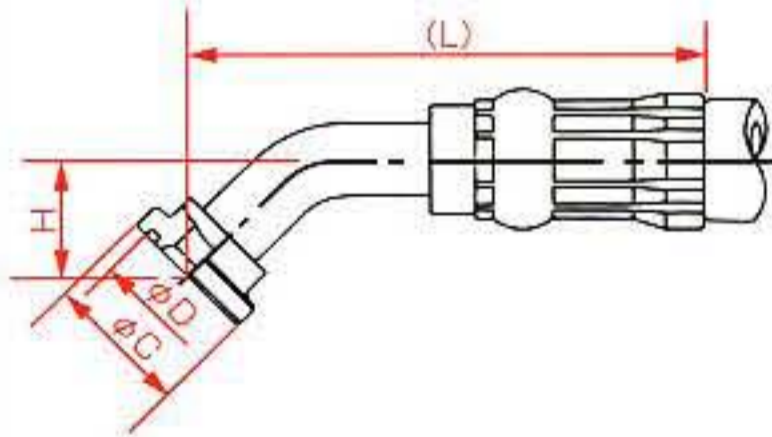
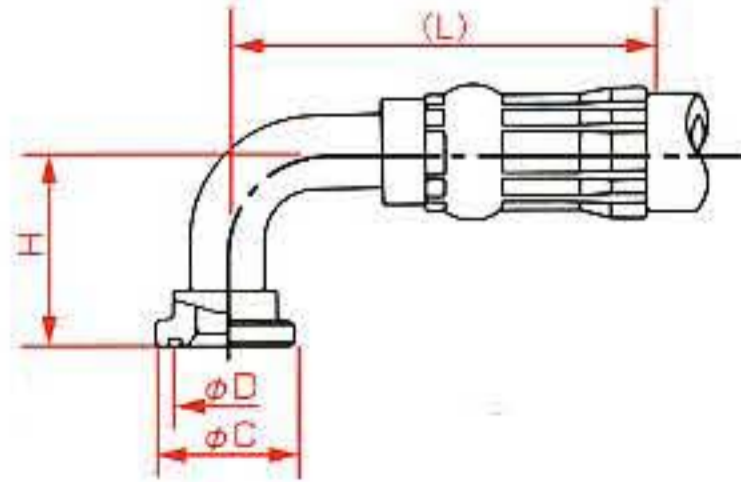


形状	金具品番	ねじ ユニファイ	内径 mm	X mm	Y mm	(L) mm	概略 重量 g
6013 ユニファイネジ	6013 -20	1 5/8-12	25.5	46	50	121	890
	6013 -24	1 7/8-12	32.0	50	60	146	1370
	6013 -32	2 1/2-12	43.0	65	75	171	2430

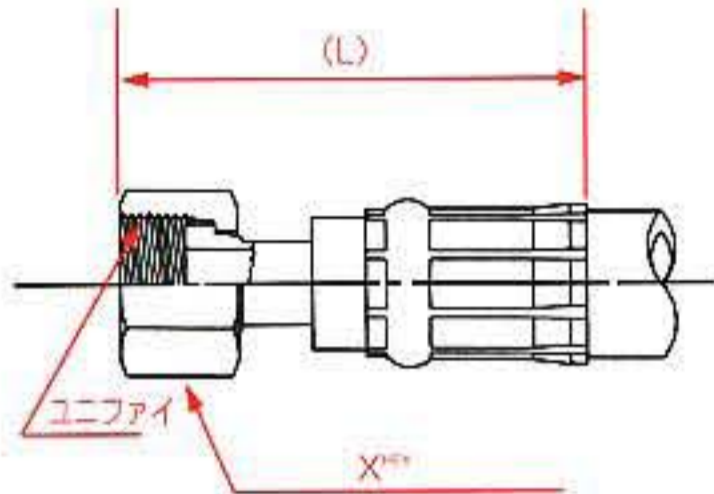
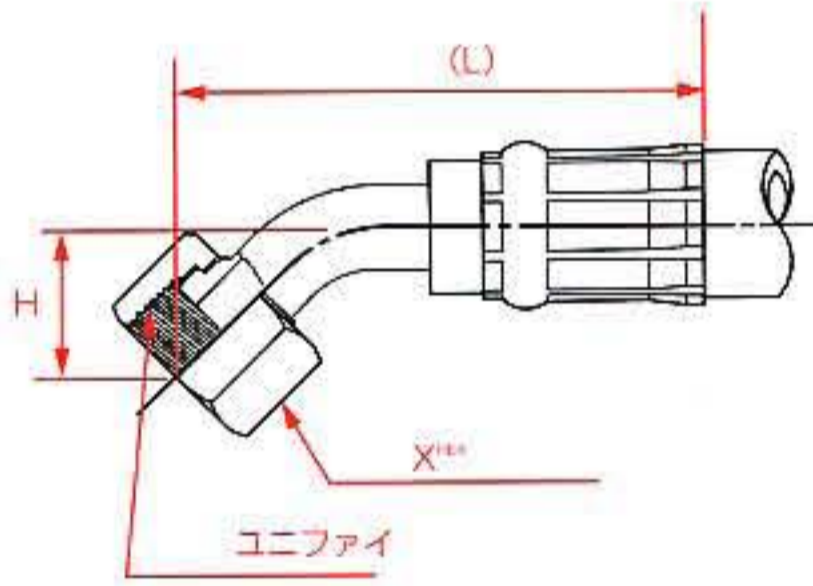
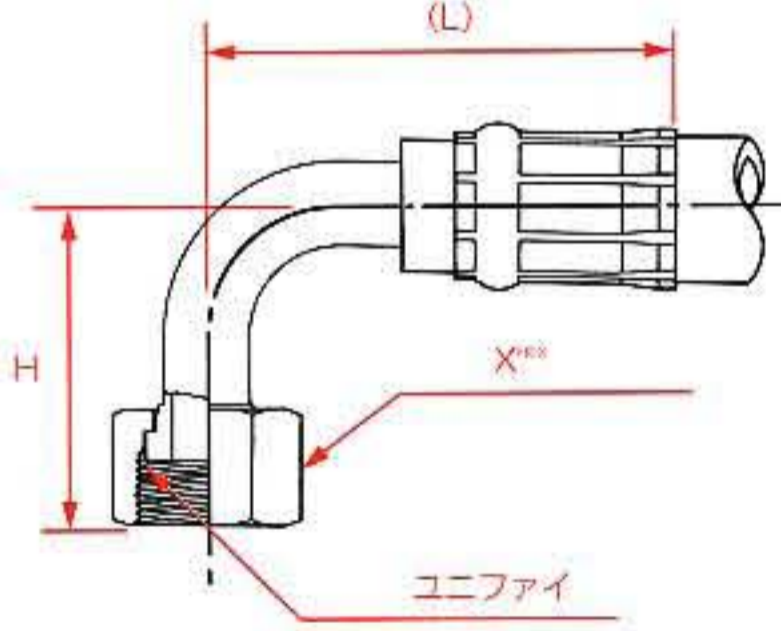


形状	適用 ホース品名	金具品番	内径 mm	C mm	D mm	(L) mm	概略 重量 g
SSFST ストレートプリットフラジ (SAEスタンダード)	OMB 10 OMB 20	SSFST -20	25.5	50.8	44.5	120	880
	OMB 10 OMB 20	SSFST -24	32.0	60.3	53.9	149	1210
	OMB 10 OMB 20	SSFST -32	43.0	71.4	63.4	170	2325

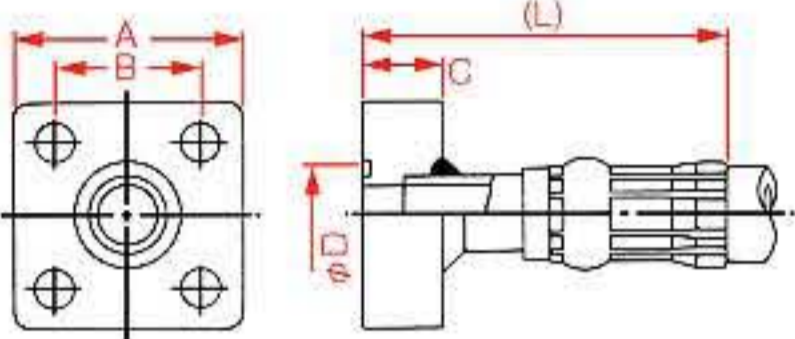
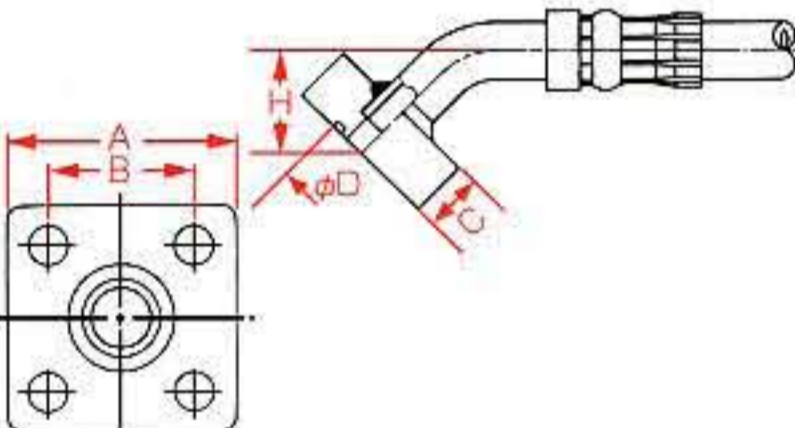
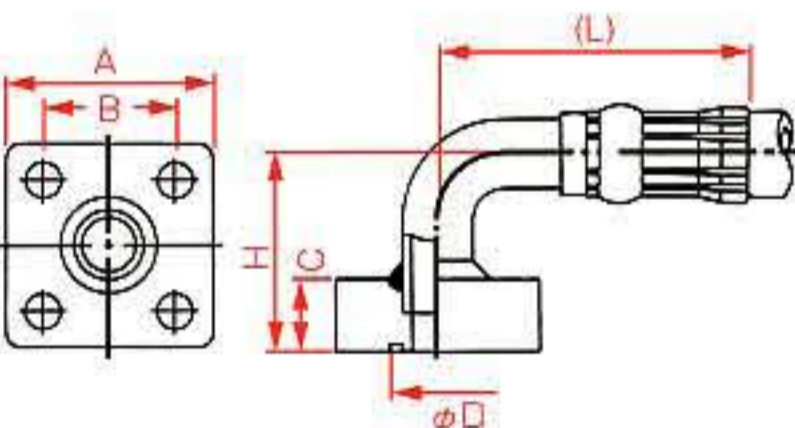
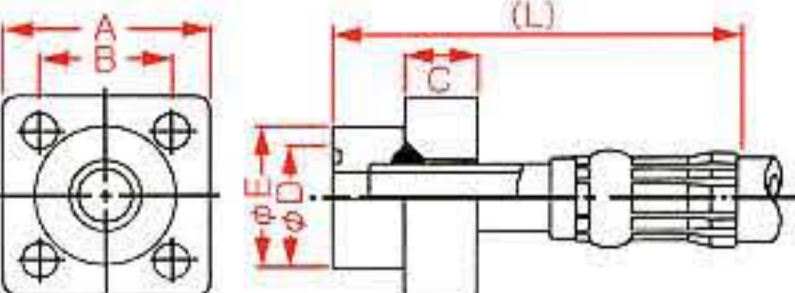


形状	適用 ホース品名	金具品番	内径 mm	C mm	D mm	H mm	(L) mm	概略 重量 g
SSF45 45°スプリットフラジ (SAEスタンダード) 	OMB 10	SSF45 -20	25.5	50.8	44.5	29	151	840
	OMB 15	SSF45 -24	32.0	60.3	53.9	36	185	1440
	OMB 20							
	OMB 28	SSF45 -32	43.0	71.4	63.4	51	228	3000
SSF90 90°スプリットフラジ (SAEスタンダード) 	OMB 10	SSF90 -20	25.5	50.8	44.5	67	146	950
	OMB 15	SSF90 -24	32.0	60.3	53.9	86	182	1580
	OMB 20							
	OMB 28	SSF90 -32	43.0	71.4	63.4	115	224	3150
HSFST ストレートスプリットフラジ (SAEハイプレッシャー) 	OMB 20	HSFST -20	25.5	54.0	44.5	-	129	960
	OMB 25	HSFST -24	32.0	63.5	53.9	-	162	1520
	OMB 32							
	OMB 35	HSFST -32	43.0	79.4	63.4	-	190	2850
HSF45 45°スプリットフラジ (SAEハイプレッシャー) 	OMB 20	HSF45 -20	23.0	54.0	44.5	49.5	185	1290
	OMB 25	HSF45 -24	30.0	63.5	53.9	60	225	2020
	OMB 32							
	OMB 35	HSF45 -32	40.0	79.4	63.4	80.5	284	3920
HSF90 90°スプリットフラジ (SAEハイプレッシャー) 	OMB 20	HSF90 -20	23.0	54.0	44.5	99	164	1450
	OMB 25	HSF90 -24	30.0	63.5	53.9	120	200	2270
	OMB 32							
	OMB 35	HSF90 -32	40.0	79.4	63.4	160	249	4400

OMB10・15・20・25・32・35ホース用

形状	金具品番	ねじ ユニファイ	内径 mm	X mm	(L) mm	概略 重量 g	
6028 ORS ストレートタイプ 	6028 -20	1 $\frac{1}{16}$ -12UN	26.5	50	135	1050	
	6028 -24	2-12UN	32.5	60	155	1450	
形状	金具品番	ねじ ユニファイ	内径 mm	X mm	H mm	(L) mm	概略 重量 g
6128 ORS 45°タイプ 	6128 -20	1 $\frac{1}{16}$ -12UN	25.0	50	45.0	181	1210
	6128 -24	2-12UN	30.7	60	47.0	211	2100
形状	金具品番	ねじ ユニファイ	内径 mm	X mm	H mm	(L) mm	概略 重量 g
6228 ORS 90°タイプ 	6228 -20	1 $\frac{1}{16}$ -12UN	25.0	50	82.0	168	1280
	6228 -24	2-12UN	30.7	60	94.0	198	2200

OMB10・15・20・25・32・35ホース用

形状	金具品番	内径 mm	A mm	B mm	C mm	D mm	H mm	(L) mm	概略 重量 g
SHAST ストレートJIS21MPa SHA固定型フランジ 	SHAST -20	25.5	90	63	28	45	-	135	2180
	SHAST -24	32.0	100	70	36	55	-	160	3190
	SHAST -32	43.0	112	80	36	65	-	181	4555
SHA45 45°JIS21MPa SHA固定型フランジ 	SHA45 -20	25.5	90	63	28	45	50	194	2150
	SHA45 -24	32.0	100	70	36	55	53	225	3880
	SHA45 -32	43.0	112	80	36	65	65	243	6000
SHA90 90°JIS21MPa SHA固定型フランジ 	SHA90 -20	25.5	90	63	28	45	108	172	2900
	SHA90 -24	32.0	100	70	36	55	126	207	3020
	SHA90 -32	43.0	112	80	36	65	141	228	6300
SHALS ストレートJIS21MPa SHAルーズ型フランジ 	SHALS -20	25.5	90	63	28	45	74	170	4080
	SHALS -24	32.0	100	70	36	55	79	189	5080
	SHALS -32	43.0	112	80	36	65	93	216	7170